

ALSAN® FLASHING



High Performance, Liquid-Applied Flashing System



ALSAN Flashing is a unique polyurethane bituminous resin specifically formulated for liquid-applied flashings, other details and maintenance applications. ALSAN Flashing utilizes a reinforcement that, in combination with its unique chemistry, provides an extremely durable and easy to apply flashing solution. The variety of suitable substrates, including concrete, wood, masonry, metal, granule and sand-surfaced Modified Bitumen membranes and PVC pipe, make ALSAN Flashing extremely versatile.

ADVANTAGES

- Conforms easily to any geometry or irregular shapes
- Quick curing, seamless flashings with the ability to match a granule cap sheet
- Single component flashing solution, no catalyst needed or wasted product
- Great for quick, cost effective repairs

PRODUCT DETAILS

PROPERTIES	VALUE
AVAILABLE SIZES	1 or 5 gallon pails
WORKING TEMP	40 - 95°F
NEXT LAYER	2 hours
RAIN PROOF	2 -12 hours
FULLY CURED	3 days

* Times provided are at 68°F (ambient & surface temperature) 5 degrees above dew point. All working and cure times are approximate and may vary upon wind, humidity and ambient/surface temperatures.




1



Pre-cut and dry fit fleece, prior to application. Tape all perimeters of penetration detail two inches beyond fleece terminations.

2

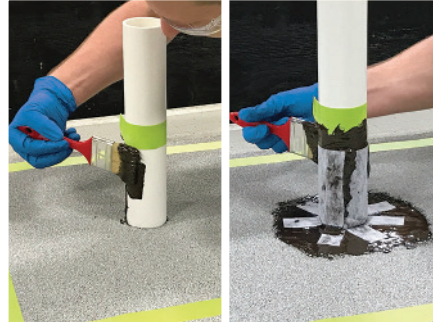

Apply ALSAN Flashing liberally with a brush at a rate of 2 gal/sq to the pipe, wrap the fleece around pipe or penetration and coat with an additional layer of ALSAN Flashing.

3



Apply ALSAN Flashing to the taped off field area at a rate of 2 gal/sq, lay fleece into the first coat and apply second coating of ALSAN Flashing. Remove the tape.

4



Once cured, apply a final coating of ALSAN Flashing at a rate of 2 gal/sq to the pipe and field, extending approximately one inch past the previous coat.

5



While it is not required, if desired, granules may be broadcast into the final coat of ALSAN Flashing to match the cap sheet.

Contact DERBIGUM Technical Services Department for complete application instructions and details.

