


DERBIGUM[®]P

Single Reinforced APP Modified Bitumen Waterproofing Membrane

ADVANTAGES

- ▶ **High quality** 3.9 mm (152 mil) smooth surfaced APP Modified Bitumen Roofing Membrane
- ▶ Derbigum's **exclusive** blend of APP (atactic polypropylene) polymers and select asphalts enhances the weathering capabilities and UV resistance of the membrane.
- ▶ **Single reinforced** with a heat resistant a 180 gram polyester mat that increases the membrane's strength and durability.
- ▶ Derbigum P may be used as both a roofing and flashing membrane.
- ▶ 30 year proven experience of the APP & Asphalt blend
- ▶ Can be applied with PERMASTIC Cold Adhesive or heat welded

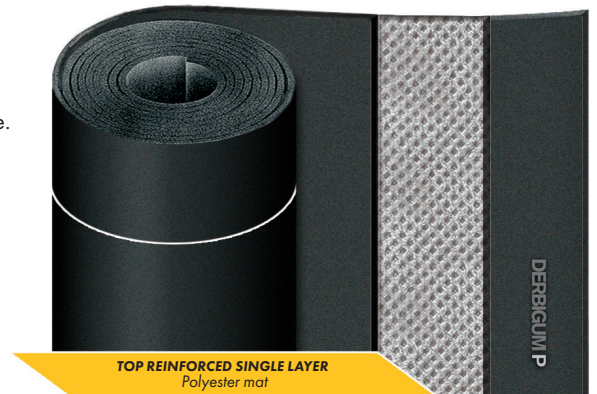

TECHNICAL CHARACTERISTICS

CHARACTERISTIC	TESTED	ASTM Requirements Test Methods D6222-16		DERBIGUM P Results*		UNITS
		MACHINE DIRECTION	CROSS DIRECTION	MACHINE DIRECTION	CROSS DIRECTION	
Tensile Strength	0 °F	60	60	90	65	lbf/in
	73 °F	50	50	80	60	lbf/in
Elongation	0 °F	10	10	10	10	%
	73 °F	23	23	37	45	%
Tear Resistance	73 °F	70	70	100	80	lbf
Dimensional Stability		1	1	0.1	0.2	%

CHARACTERISTIC	INITIAL	AGED	INITIAL	AGED	UNITS
Cold Flex	0	0	-18	-2	°C

Tested initially within 24 hours and again aged 28 days.

CHARACTERISTIC	MINIMUM	MINIMUM	UNITS
Compound Stability	275	Pass	°F

* All values shown are nominal and subject to normal manufacturing tolerances.

PRODUCT INFORMATION*

CHARACTERISTIC	U.S. CUSTOMARY	METRIC
Thickness	152 mil	3.9 mm
Length	33 ft 6 in	10.2 m
Width	39 3/8 in	1.0 m
Weight	88 lb	39.9 kg
Net Coverage	100 sq ft	9.2 sq m

* All values shown are nominal and subject to normal manufacturing tolerances.

PACKAGING & STORAGE

Packaged 20 rolls per pallet. Rolls should be stored on end, on raised platforms protected from the weather.



SDS available
on request:
(800) 727-9872
www.derbigum.us

